



VITO 60 - Filtration system for coolant lubricants, oils and watery solutions

VITO 60 is suitable for all industrial basins

Functionality:

VITO 90 can be placed easily into the tank for a fast cleaning:

You can clean and filter all of your baths immediately - the patented mechanical micro filtration technology of VITO only needs a couple of minutes.

The result is a clean high quality coolant lubricant, oil and watery solution - freed from chips and solids.

VITO 60 saves coolant lubricant, labour, stock ground and transport costs.

Big savings:

- less tool wear
- less personnel costs
- less transport costs
- less disposal costs
- fast amortisation

Constant quality:

- ...of your coolant lubricant
- ...of your workpieces

Easy handling:

- automatic filtration
- fast pressure filtration
- low cleaning effort




VITO AG

T: +49 (0) 7461 / 1508050
F: +49 (0) 7461 / 1508051

info@vitofilter.com
www.vitofilter.com

VITO 60

Spec-Sheet

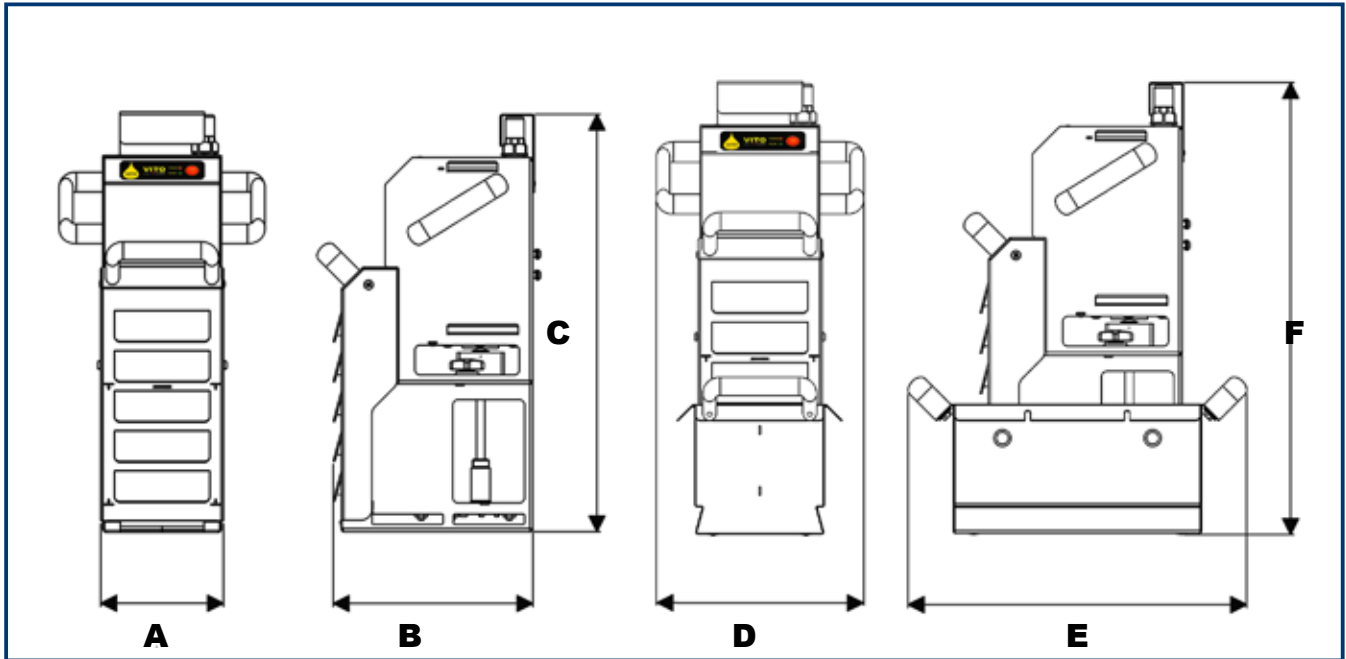

VITO 60 technical data:

	Width A	Depth B	Height C		Width D	Depth E	Height F	
without drip pan	116 mm	191 mm	398 mm	with drip pan	195 mm	320 mm	426 mm	
Filtration power	Filtration	Particle uptake	Cycle time	Suction depth	Weight	Temperature	Material VITO	Particle filter
up to 60l/min	up to 5 µm	1,3 kg	15 min (adjustable)	~ 35 cm	7,7 kg	max. 175°C	Stainless steel 1.4301	Polyester-Cellulose
Maximum Power	Power connection							
300 W	220-240 V (100-120 V) 50-60 Hz							

Additional features:

- 💧 VITO 60 can operate in washing baths at service temperature



VITO AG

T: +49 (0) 7461 / 1508050
F: +49 (0) 7461 / 1508051

info@vitofilter.com
www.vitofilter.com